


# CS6-Ni Cad

BY WESTERN LIGHTING

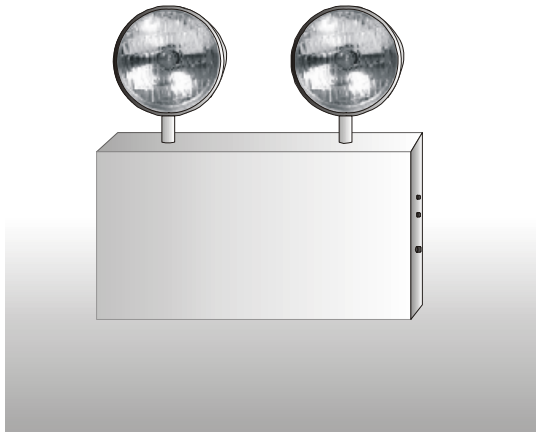

**6 VOLT  
WALL MOUNTED  
EMERGENCY LIGHTING UNIT  
STEEL CASE, STEEL HEADS  
Nickel-Cadmium Battery**

## SPECIFICATIONS

<p><b>HOUSIN</b> White painted 20-gauge steel, is easily mounted. Access to test switch and LED charge/AC indicator lamp are on the side.</p> <p><b>BATTERY:</b> Standard is maintenance free sealed nickel-cadmium battery, 90 minute operation. <b>"-90m"</b> 6V 7 AH 120 minute operation <b>"-120m "</b> 6V 12 AH</p> <p><b>HEADS:</b> Two metal heads specify <b>"-2H"</b> (standard). One metal head specify <b>"-1H"</b> No heads <b>"-0H"</b>.</p> <p><b>CHARGER:</b> Dual 120/277v input. Solid-state 6 volts DC design meets UL 924 recharge requirements. Low voltage battery disconnect protects against deep discharge, Line latch circuit included. Brown out protected.</p>	<p><b>LAMPS:</b> 12 watt Halogen lamps with glass lens are standard.</p> <p><b>OPTIONS:</b> <b>Battery Heater and thermostat</b> For Cold-Weather applications Activates at +50deg F <b>"-HTR"</b> Wired for one remote mounted heads <b>"-1R"</b>. Wired for two remote mounted heads <b>"-2R"</b>. For remote test by a hand held transmitter specify <b>"-RT"</b> Stainless Steel Housing <b>"-SS"</b> Wire guard <b>"-WG"</b>.</p> <p><b>CODES:</b> ETL listed. Complies with NEC and Life Safety Code. Meets City of Chicago requirements.</p> <p><b>DIMENSIONS:</b> Width (housing) 12-3/4" Depth 6-1/2" Height with heads 11-1/2"</p>
--	--

## ORDERING CODE

SERIES	BATTERY	HEADS	OPTIONS
<b>CS6-Ni-Cad</b>	<b>+</b>	<b>+</b>	<b>+</b>
	90M 120M	2H 1H 0H	HTR 1R 2R SS WG



**WESTERN LIGHTING, INC.**  
2349 N. 17th Ave. • Franklin Park, IL 60131-3432  
(847) 451-7200 • Fax: (847) 451-7275

