


TYPE \_\_\_\_\_

# PK/2H-LED/SM

BY WESTERN LIGHTING

**EXIT HAS LONG-LIFE LED LIGHT SOURCE, BATTERY BACK-UP  
SLIM PROFILE  
INJECTION MOLDED PLASTIC  
EMERGENCY LIGHT AND  
EXIT SIGN**

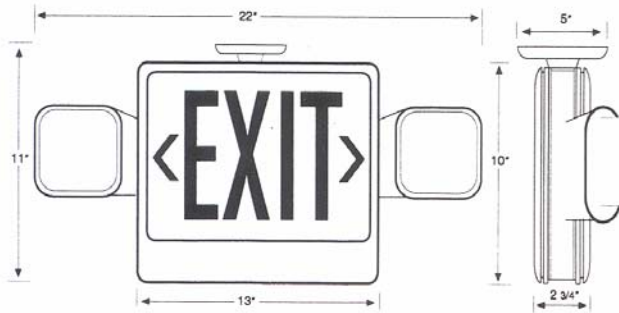

## SPECIFICATIONS

**HOUSING:** Injection molded thermoplastic ABS housing uses snap together components for quick assembly. Exit has an integral optical system to insure even surface luminance.

**INSCRIPTION:** Full 6" high x 3/4" stroke red letters behind cut-out stencil face. Field-selectable Chevron indicators.

**EXIT LAMPS:** Fixture is illuminated internally by the use of an **LED** (light-emitting diode) light array. LED lamps require no maintenance and consume less than one watt per fixture. No visible LED lamps.  
For red letters specify "-R"  
For green letters specify "-G"

**EM LAMPS:** Two adjustable 6 volt 5.6 watt DC T5 Wedge base lamps are standard.

**CHARGER:** Dual rate float charger complies with UL's re-charge time requirements with topping float charge for full capacity emergency operation. Test switch and charge LED are standard.

**EMERGENCY OPERATION:** Emergency Calcium lead battery back up is rated for 90 or more minutes of operation. Power consumption is 3.8 watts in normal operation, 15 watts in emergency operation. LED AC on indicator and push-to-test switch is included.

**VOLTAGE:** 120v or 277v inputs are accommodated with dual-tap battery charger.

**FINISH:** White, U.V. stable thermoplastic UL V 94 fire rated.

**MOUNTING:** Knockouts are provided on back for wall mounting. Universal mount canopy permits single face or double face installation from side or ceiling.

**CODES:** Complies with ANSI/UL 924, NEC and NFPA-101 Life Safety Code. UL Listed.

**DIMENSIONS:** Height 10-1/8"  
Width 22-3/4"  
Depth 4-3/8"  
Shallow Canopy adds 1" to height.

## ORDERING CODE

SERIES	LAMP COLOR	FACES	VOLTAGE
PK/2H-LED-EM-SM	+	+ U	+ 120/277
	R= Red LED G=Green LED	U = UNIVERSAL MOUNT, SF & DF WITH CANOPY	



**WESTERN LIGHTING, INC.**

2349 N. 17th Ave. • Franklin Park, IL 60131-3432  
(847) 451-7200 • Fax: (847) 451-7275

