



WP

BY WESTERN LIGHTING

**WET LOCATION STAINLESS STEEL
DIRECTIONAL AND
EXIT SIGN
LED, FLUORESCENT**

SPECIFICATIONS

HOUSING: 20 gauge #304 brushed stainless steel is standard, single or double face sign for back wall mounting, end mounting, ceiling or pendant mounting.

GASKETING: Closed-cell neoprene gasketing applied to both the housing and the exterior trim frame compress inscription panels. Panels slide into captive stainless steel channels.

INTERIOR: Wireways are white powder coated steel. Lamp sockets are mounted on removable wire way.

INSCRIPTIONS: Full 6" high x 3/4" stroke red letters on phosphorescent glass panel.
Red letters on white **"-R/W"**
Green letters on white **"-G/W"**
For special inscriptions and graphics **"-S/G"** consult factory.

LAMPS: **White LED 4.5 watt array specify "-LED" (5 year warranty)**
Two 7 watt compact fluorescent lamps, Specify **"-PL-7"**
Two additional 6 volt DC lamps specify **"-6VDC"**
For use with external remote battery charger **CS-6-0H** (order separately)

MOUNTING: 7/8" diameter knockouts are provided on top, side and back.
Canopy kit available, **"-CPY"**
1/2" trade size gasketed conduit hub for threaded connection **"-HUB-1"**

VOLTAGE: **LED** and Fluorescent 120 or 277, (specify)
Low Ambient fluorescent ballasts optional **"-LA"**
Incandescent 120 volt only.

OPTIONS: Vandal resistant double panel **"-VR/GL"**
Consists of 1/4" thick clear tempered glass with double gasketing in front of inscription panel.
Outer frame fastened with spanner-head tamper proof screws.
For above with polycarbonate **"-VR/PC"**

CODES: ETL listed. Complies with UL 924, NEC and NFPA 101 Life Safety Code.
Approved by Fire Prevention Bureau, City of Chicago **(Glass Panels Only)**.

DIMENSIONS:

Exit & Stair	Height	9 1/2"
	Width	12 1/4"
	Depth	4 1/4"
Canopy adds 9/16"		

ORDERING CODE

SERIES	INSCRIPTIONS	LAMPS	VOLT	FINISH	OPTIONS
WP	+	+	+	+	+
	(*CODE)-R/W (*CODE)-G/W (*CODE)-SG *SEE BELOW	LED PL7 LL	120 277	SS	VR/GL VR/PC CPY HUB-1 SG 6VDC



INSCRIPTIONS	SINGLE FACE				DOUBLE FACE			
	NO ARROW	ARROW RIGHT	ARROW LEFT	DOUBLE ARROW	NO ARROW	ARROW RIGHT	ARROW LEFT	DOUBLE ARROW
EXIT	3	6	9	12	18	21	21	24
STAIR	2A	5A	8A	11A	17A	20A	20A	23A



WESTERN LIGHTING, INC.

2349 N. 17th Ave. • Franklin Park, IL 60131-3432
(847) 451-7200 • Fax: (847) 451-7275



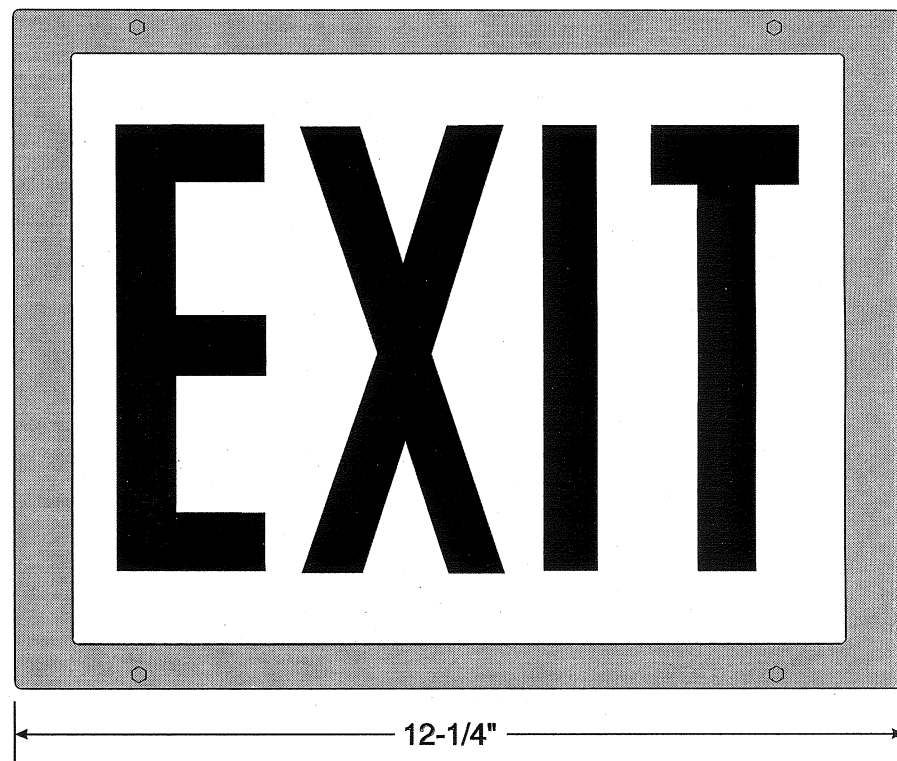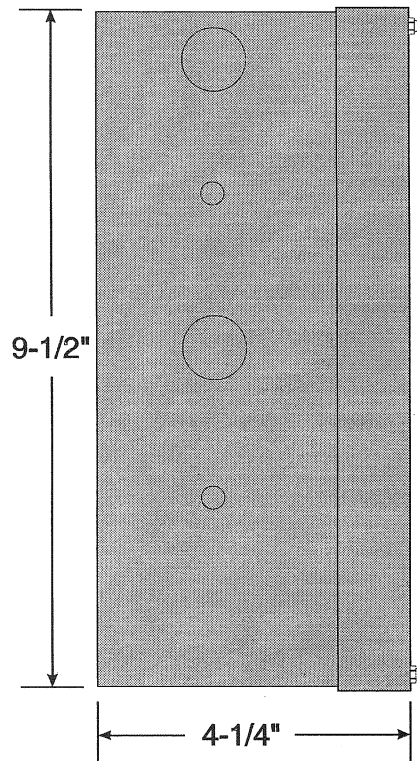

Drawing #: WP1.1	Date: 4-10-98	Revised:	Scale: NTS
---------------------	------------------	----------	---------------

**WP Series Exit Fixture
Dimensions**



WESTERN LIGHTING, INC.
2349 N. 17th Ave. Franklin Park, IL 60131
(847)451-7200 • Fax (847)451-7275

